

iTRACKER® BATTERY REPLACEMENT

The iTracker is powered by 2 D-size **Non-Rechargeable** Tadiran Lithium Batteries (TL-5930) requiring replacement when discharged. It is imperative to change **BOTH** batteries simultaneously. After replacement of **BOTH** batteries, the “Battery” command on the iTracker Setup page must be initiated in order for the Battery Discharge Monitor on the “Live Value” screen to reset its value to approximately 99%.

It is important to remember that when replacing a used set of iTracker batteries, one needs to make sure to replace both of the old batteries with new ones while never combining a new lithium battery with one that has been previously used.

To reset the Battery Discharge Monitor to full battery value, bring up the SETTINGS page by clicking on “Settings” located on the far right bottom of your screen. The iTracker Setup page will appear. Look for the “Command” entry box located immediately under the “Level” box at the bottom of the iTracker setup page. If the “Command” entry box is not visible at the bottom of the screen, continue to scroll down until it appears.

The screenshot shows the iTracker Setup page with the following fields and values:

- Site Name: Site01
- Pipe ID: 8
- Damping: 3
- Log Interval(min.): 1
- Units of Measure: English
- Population: 100
- Date/Time: 10/03/2016 10:55:58
- Level: (empty)

Buttons: Save, Sync, Send

Bottom navigation: Live, History, Logs, Settings


The screenshot shows the iTracker Setup page with the following fields and values:

- Log Interval(min.): 15
- Units of Measure: English
- Population: 100
- Date/Time: 10/03/2016 12:38:42
- Level: (empty)
- Command: (empty)
- iTracker Ver: 1.7.6
- Wifi Ver: 2.4.2.2

Buttons: Save, Sync, Send


Bottom navigation: Live, History, Logs, Settings

Once the entry box labeled “Command” is selected, a “keyboard” will appear at the bottom of the screen.

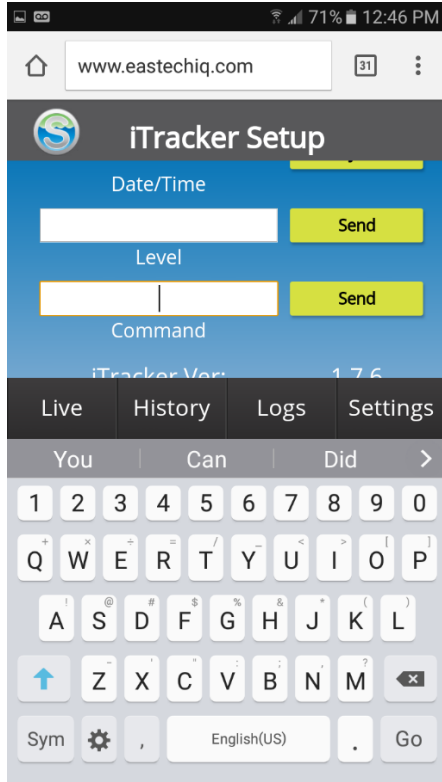

Type the word “Battery” in the space provided within the Command input box. Lower-case letters should be used except for the first letter that can be upper case. Upon completion of the Command, click on the “Send” button located to the right of the Command box in order to relay the selected Command to the iTracker sensor.

A screen designating that the “Command” is in the process of loading along with a “spinning” wheel will appear until the “Command” procedure is complete. Upon completion, the SETTINGS page will return.

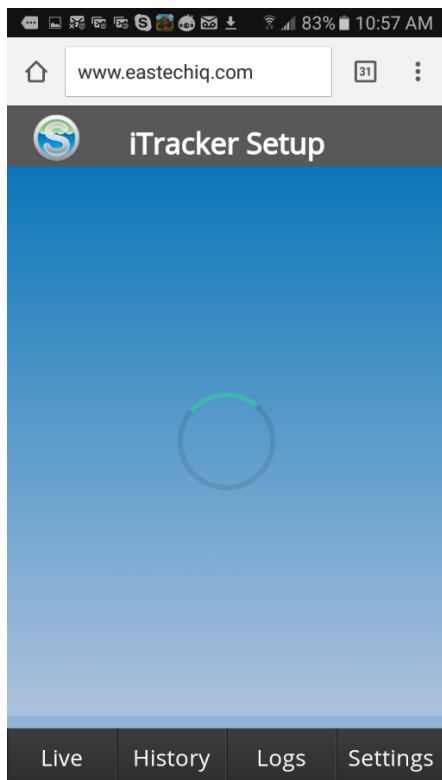

It is important to note that some commands may take a while to complete and could affect your Wi-Fi connection. If the SETTINGS Page is not reinstated after completion of the COMMAND process, please reconnect to the iTracker sensor.

For assistance regarding battery replacement, please call 1-800-226-3569 Ext. 6 and request Technical Support.